


# ARCHITECT'S FIRST CHOICE




CONNECTION TECHNIQUES FOR PVC, UPVC AND CPVC PIPING SYSTEMS  
MEETS ASTM STANDARD QUALITY REQUIREMENTS

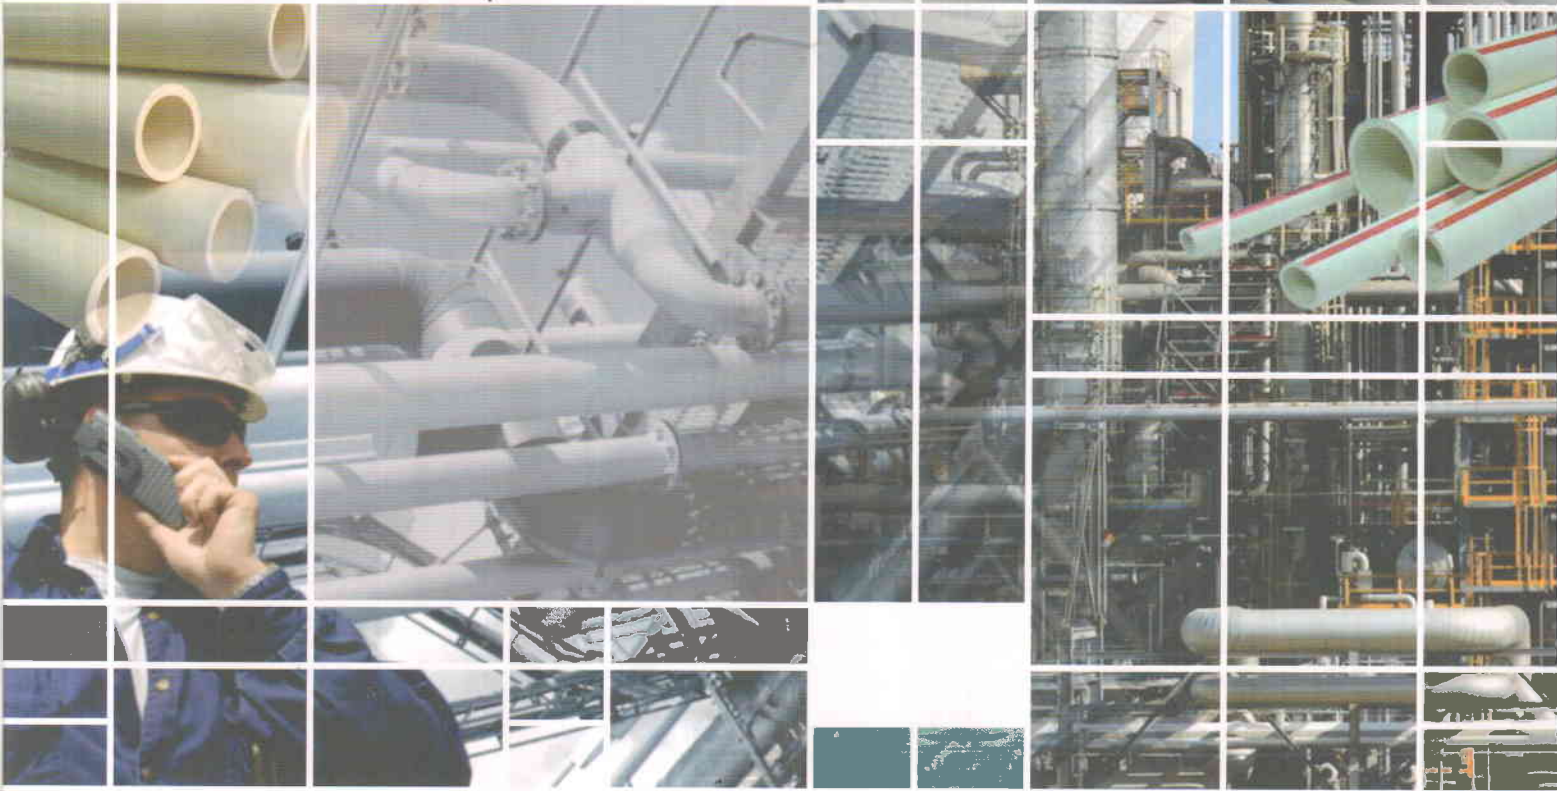

PERFECT CHOICE OF  
**PLUMBING  
PROFESSIONALS**

In technical Collaboration with  
**INNOVATIVE ADHESIVE INC., USA**

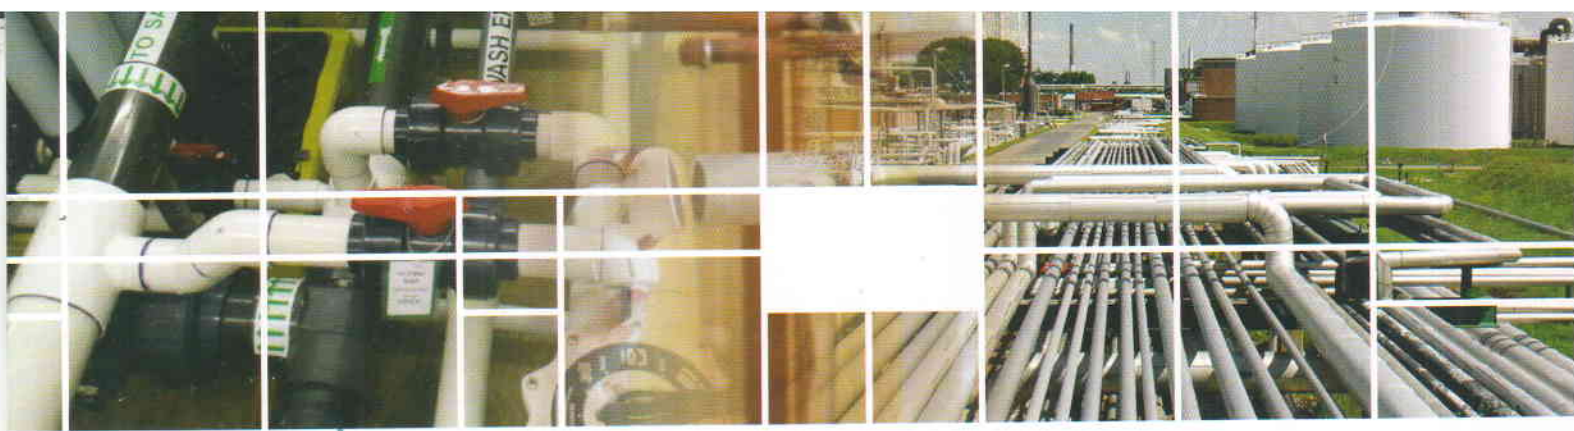

SEALTITE® offers extensive specialty products to meet all your piping needs, including repair adhesives for leaking joints, pipe thread sealants and water-saving gasket lubricants, as well as test plugs for testing the integrity of DWV and sewer systems.

SEALTITE® offers the most extensive line of Primers and Cleaners for the piping industry. These products are used for the surface preparation of plastic pipe and fittings, which is necessary for the proper solvent welding of these materials. All SEALTITE® Primers and Cleaners are low VOC products, which are environmentally friendly with lower emissions and reduced odour, surpassing the most stringent regulations.\* All SEALTITE® Primers and Cleaners are formulated for use on PVC and CPVC pipe and fittings, and our SEALTITE Cleaner can also be used on ABS and styrene piping applications.

KOTA group of companies is the pioneer and leading manufacturer of SEALTITE® solvent cements, primers and cleaners for PVC, CPVC, ABS and other plastic piping systems. SEALTITE® products are globally-recognized as the premium products for joining plastic pipes and fittings. Headquartered at VADODARA, SEALTITE® has pan India presence of sales representatives and distribution network.

Our Commitment

#### **QUALITY POLICY**

SEALTITE® delivers superior quality, environmentally friendly products and services to our customers. Continuous improvement of our people, products and processes is the responsibility of all employees.





## UPVC SOLVENT CEMENT

### SEAL TITE – U 1200 – clear-regular bodied-fast setting

#### MEETS ASTM D-2564

- Regular bodied, fast setting upvc/pvc cement for joining pipes, sockets And fittings **through 3”diameter schedule 40 and schedule 80 interfit.**
- Quality formulation for residential plumbing, industrial, pool and spa, Irrigation ,electrical conduit, pvc foam core pipe and swr systems.
- Storage: store in cool and dry place at room temp.
- Shelf life: 36 months.**

PACKING SIZE	59 ml ( 2 OZ)	118 ml ( 4 OZ)	237 ml ( 8 OZ)
	474 ml ( 16 OZ)	948 ml ( 32 OZ)	



### SEAL TITE – U 1204 – clear-medium bodied-fast setting

#### MEETS ASTM D-2564

- Medium bodied, fast setting upvc/pvc cement for joining pipes, Sockets and fittings with interference fit upto schedule 40 through 6”diameter and schedule 80 through 4” diameter.
- Seal tite primer is strongly recommended for more then 3” diameter pipe.
- Leakproof pipe joining for upvc/pvc pipe and fitting.
- Quality formulation for residential plumbing, industrial, pool and spa, irrigation, Electrical conduit, pvc foam core pipe and swr systems.”
- Storage: store in cool and dry place at room temp.
- Shelf life: 36 months.**

PACKING SIZE	59 ml ( 2 OZ)	118 ml ( 4 OZ)	237 ml ( 8 OZ)
	474 ml ( 16 OZ)	948 ml ( 32 OZ)	TUBE SIZE : 10ml 25 ml



### SEAL TITE – U 1210 – clear - heavy bodied-medium setting

#### MEETS ASTM D-2564

- Heavy bodied, medium setting upvc/pvc cement for all classes of pipes and Fittings **through 12” diameter including schedule 80.**
- It has good gap filling properties and its medium set allows more working time in Warm weather.
- Quality formulation for residential plumbing, industrial, pool and spa, irrigation.
- Electrical conduit, pvc foam core pipe and swr systems.
- Seal tite primer is strongly recommended for more then 3” diameter pipe.
- Storage: store in cool and dry place at room temp.
- Shelf life: 36 months.**

PACKING SIZE	59 ml ( 2 OZ)	118 ml ( 4 OZ)	237 ml ( 8 OZ)
	474 ml ( 16 OZ)	948 ml ( 32 OZ)	



## CPVC SOLVENT CEMENT

### SEAL TITE – C 1310 – orange-heavy bodied-medium setting

#### MEETS ASTM D-2846 AND ASTM F-493

- Leakproof pipe joining for all types of cpvc pipes, sockets and fittings with interference fit **through 12" diameter schedules 40 and sch. 80.**
- Quality formulation for potable hot and cold water up to 180° f (82° c). Suitable for residential and industrial plumbing.
- Seal tite primer is strongly recommended for more then 3" diameter pipe.
- Storage: store in cool and dry place at room temp.
- Shelf life: 24 months.**

PACKING SIZE	59 ml ( 2 OZ)	118 ml ( 4 OZ)	237 ml ( 8 OZ)
	474 ml ( 16 OZ)		948 ml ( 32 OZ)



### SEAL TITE – C 1315 – yellow - medium bodied-fast setting

#### MEETS ASTM D-2846 AND ASTM F-493

- Leakproof pipe joining for all types of cpvc pipes, sockets and fittings with interference fit **through 4" diameter schedules 40 and sch.80.**
- Quality formulation for potable hot and cold water up to 180° f (82° c). Suitable for residential and industrial plumbing.
- Storage: store in cool and dry place at room temp.
- Shelf life: 24 months.**

PACKING SIZE	59 ml ( 2 OZ)	118 ml ( 4 OZ)	237 ml ( 8 OZ)
	474 ml ( 16 OZ)	948 ml ( 32 OZ)	TUBE SIZE : 10ml 25 ml



### SEAL TITE – C 1317 – orange-medium bodied-medium setting

#### MEETS ASTM D-2846 AND ASTM F-493

- Leakproof pipe joining for all types of cpvc pipes, sockets and fittings with interference fit **through 4" diameter schedules 40 and sch.80.**
- Premium, high strength, chemical resistance cement for use with cpvc piping systems carrying acids, base, salts and hypochloride.
- Quality formulation for waste water plants.
- Seal tite primer is strongly recommended for more then 3" diameter pipe.
- Storage: store in cool and dry place at room temp.
- Shelf life: 24 months.**

PACKING SIZE	59 ml ( 2 OZ)	118 ml ( 4 OZ)	237 ml ( 8 OZ)
	474 ml ( 16 OZ)		948 ml ( 32 OZ)





## ABS CEMENT

### SEAL TITE - A 1415 -milky-medium bodied-fast setting

#### MEETS ASTM D-2235

- Leakproof pipe joining for all types of abs pipes, sockets and fittings through 8" diameter with interference fit.
- Quality formulation for plumbing application (dmv, sever and drain pipe) conduit and foam core.
- Storage: store in cool and dry place at room temp.
- Shelf life: 24 months.**

PACKING SIZE	59 ml ( 2 OZ)	118 ml ( 4 OZ)	237 ml ( 8 OZ)
	474 ml ( 16 OZ)		948 ml ( 32 OZ)

## PRIMER

### SEAL TITE PRIMER - clear-advisable for upvc-cpvc and pvc piping

#### MEETS ASTM F-656

- Makes perfect platform for leakproof pipe joining for all types of upvc, cpvc and pvc pipes and fittings.
- Quality formulation for all classes and schedules through larger diameters.
- Strongly recommended **for more than 3" diameter pipe.**
- Removes surface dirt, grease and soften the joining surface rapidly for strong bonding.
- Ideal for residential plumbing, industrial, pool and spa, irrigation, electrical conduit, pvc foam core pipe and swr systems.
- Storage: store in cool and dry place at room temp.
- Shelf life: 36 months.**

PACKING SIZE	118 ml ( 4 OZ)	237ml ( 8 OZ)
	473 ml ( 16 OZ)	946 ml ( 32 OZ)

## LUBRICANTS

### SEAL TITE - rubber lubricant-adhesive

#### FOR JOINING OF SWR, PVC PIPING SYSTEMS

- Paste type, simple, for quick leakproof joining of pvc, swr piping systems.
- Bacteria free, non toxic, non flammable material does not contain natural or synthetic rubber.
- Ideal for potable water systems, sewer drain piping systems against non pressure application.

PACKING SIZE	100 gm	250 gm	500 gm
--------------	--------	--------	--------



## IRRIGATION PVC SOLVENT CEMENT

### SEAL TITE – P 1045 – clear-pvc solvent cement



- It is a regular bodied slow setting rigid pvc cement for joining pipes, sockets and fittings with interference fit in pressure and drainage systems. It is also suitable for piping systems with cylindrical and conical fittings.
- Leakproof pipe joining for pvc pipe and fittings.
- Highly recommended for rigid pvc pipe and fittings. Specially recommended for irrigation systems.
- Extremely useful in tropical areas.
- Storage: store in cool and dry place.
- **Shelf life: 1 year**

PACKING SIZE	50 ml	100 ml	250 ml
	500 ml	1 ltr	5 ltr

## PIPE SEALANTS

### SEAL TITE LIQUID SEALANT- black-white-adhesive

#### FOR G.I. PIPE AND FITTINGS



- Makes perfect excellent adhesion and bonding for leakproof pipe joining for All types of metal pipes and fittings.
- Quality formulation for thread locking, sealing, bonding and gasketing.
- Withstands action of hot and cold water, solvents such as petrol, Oil, kerosene, chemicals such as salt solutions and dilute acids, corrosive gases Such as sulphur dioxide, ammonia etc.
- Ideal for residential plumbing, industrial.
- Storage: store in cool and dry place at room temp.
- **Shelf life: 12 months.**



PACKING SIZE	50 g	100 g	200 g
	500 g		1 kg

## PTFE Seal Tape

We have achieved expertise in manufacturing and supplying **PTFE Seal Tape** which is tested for quality at each stage of production, such that flawless variety of Seal Tape can be supplied to the market. PTFE Seal Tape manufactured by the company is in demand for outstanding acid -resistant and alkali-resistant features. The range of PTFE Seal Tape is offered to the clients at competitive market prices within a predetermined time-frame in secured packing . We are the preferential choice for obtaining quality PTFE Seal Tape.



- Excellent acid-resistant
- Alkali -resistant
- Insulation of high and low temperature
- Customized length, width & brand
- Industrial Suppliers
- Pipe fitting Suppliers
- Plumbing material Suppliers
- Building material Suppliers



## SEAL TITE



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	10
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## TOPAZ



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	10
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## WHITE GOLD



Specifications	
Width (mm)	12.5, 19, 25
Length (mtrs)	12
Thickness (mm)	0.101
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## RUBI



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	10
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## COMET



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	10
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## GALAXY



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	10
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## VIVO



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	10
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## GLAN



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	15
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170

## KEN



Specifications	
Width (mm)	12, 19, 25
Length (mtrs)	15
Thickness (mm)	0.075
pH Range	0-14
Temperature	-240 c to +260 c
Pressure	170



